


AF 'Defender' Anodes Al-Zn-In

Aluminium Anodes - Sub-sea Structure, Harbour walls & Jetties

Examples of Central Core extension or 'cow horn' design

Anode Code	Anode Length (mm)	Anode Width (mm)	Anode Depth (mm)	Core Diameter (mm)	Anode Weight (kg) Net/Gross*
AFA 200	446	133	127	20	20/22.5
AFA 210	1500	75	75	21	21/23
AFA 350	1210	105	105	20	35/38.9
AFA 355	815	133	127	20	35.5/38.9
AFA 580	2000	105	105	20	58/63.8
AFA 680	1515	133	127	20	68/72.5
AFA 1190	1530	184	159	25	119/126
AFA 1200	1530	184	159	60	111/131
AFA 1480	2373	160	162	60	148/167
AFA 1500	1770	184	184	60	150/169
AFA 1850	2750	160	160	40	185/205
AFA 2400	2622	210	210	114	240/305

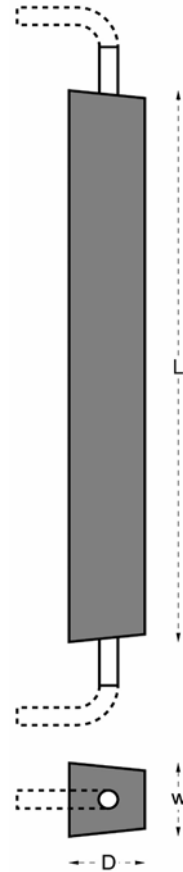

Anode materials/ manufacturing according to Det Norske Veritas DNV RP B401 * gross weight with 150mm core extensions each end (as shown in solid). Other insert bend configurations and tubular inserts available.

'Defender' aluminium sacrificial anodes can be custom designed to suit your application. We offer a selection of alloys, dimensions and inserts to suit your corrosion protection and fabrication requirements.

Contact us to discuss your requirements

www.aberdeenfoundries.co.uk

Sales@Aberdeenfoundries.co.uk

Tel: 01224 635435

Fax 01224 624377

Aluminium and Zinc Castings Aluminium Offshore Anodes • Zinc & Al Marine Hull Anodes
• Tank Anodes • Pipeline Anodes • Down-hole Centralisers and Clamps • Ballast Weights